




Porcelain switches - socket USA 2A

ROO

DIMENSIONS




VOLTAGE

110 – 125 V AC, 20A
50/60 Hz

CERTIFICATE

WIRING DIAGRAM

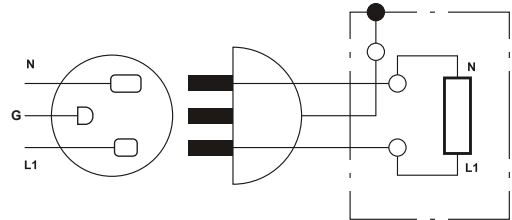


MACHINE & WARRANTY

KATY PATY + O3ZOR




Extended warranty:
for porcelain: 50 years
for el. machine: 10 years

DISTANCE BETWEEN BOXES



GAP

for gap below the wall surface
use following reduction




COLORS (SURFACE)

Glossy
Matt


SCREWS




TIGHTENING TORQUE



ASSEMBLY



COMPATIBILITY OF BOXES

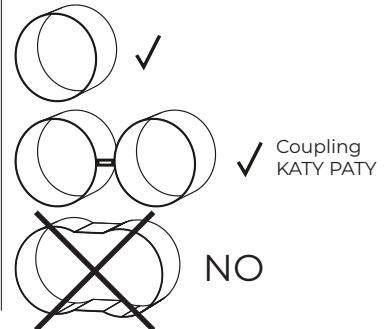

FRAGILE



HANDLE WITH CARE

BLOCKED FOR TRANSPORT

Weight: 140g